

## Boulevard™ 5000<sup>HD</sup>

Boulevard 5000<sup>HD</sup> is constructed from 100% solution dyed nylon yarn and incorporates a light scraper fibre for optimum dirt removal and moisture retention. The range is available in a choice of eight colours in either sheet or tile format.

Boulevard 5000<sup>HD</sup> can be used in conjunction with a primary entrance mat and in some situations can be used as stand-alone matting in entrances and access points.

The range is designed to complement Boulevard Stripe<sup>HD</sup> secondary barrier carpet, Esplanade 5000<sup>HD</sup> and Access 5000<sup>HD</sup> primary barrier matting.

**Typical applications:** Used in conjunction with a primary mat or as a stand-alone mat. Also in lift lobbies, corridors and service areas

## Product Information

See secondary matting product selection guide - **pages 36-37**



Warranties:	Tile	Sheet
Wear	5 Years	5 Years

Specification:	Tile	Sheet
Product Dimensions	500mm x 500mm	25m x 2m
Product Construction	Tufted Cut Pile	
Surface Yarn	100% Aquafil Alto Chroma SDN	
Total Carpet Weight	4600 g/m <sup>2</sup>	4600 g/m <sup>2</sup>
Tufted Pile Weight	800 g/m <sup>2</sup>	800 g/m <sup>2</sup>
Primary Backing	Non-woven	Non-woven
Secondary Backing	Bitumen	pvc
Total Carpet Thickness	8mm	7.5mm
Pile Height	5mm	5mm

### Performance Specification

Classification BSEN 1307	Class 3
Static Electricity ISO 6356	<2kV

### Flammability

BSEN 13501-1	Class Cfl-s1
--------------	--------------


For recommended adhesives contact Technical Services on 01625 428922.



### Samples

An accurate colour match can only be achieved by requesting the relevant product sample(s) from Gradus Technical Support on 01625 428922.

500mm x 500mm View

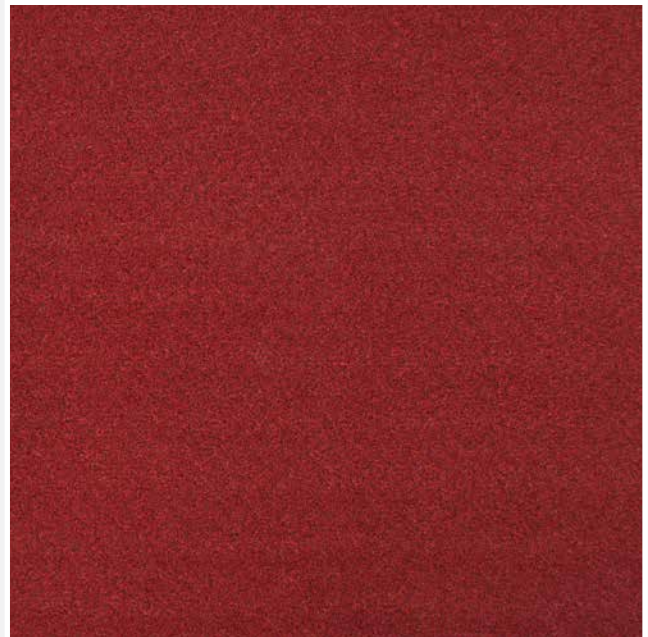

Redpoll



Corncrake  
LRV 9.52




Kestrel  
LRV 5.42



Shelduck  
LRV 5.20



Redpoll  
LRV 4.14



Cuckoo  
LRV 5.63



Swallow  
LRV 2.08



Moorhen  
LRV 2.98



Jackdaw  
LRV 1.73