

Mats

Cero Plus Rolls

Designed and built to scrape and protect!

Milliken™






Cero Plus rolls are manufactured on a PVC backing with borders on the long sides. Colour available: dark grey.

Rolls can be cut to the desired length to produce a tailor made mat or runner. This can be loose laid on the floor, or bonded to the subfloor using an acrylic tackifier adhesive.

Cero Plus in a recessed mat well

Eco-flex® underlay can be used to compensate mat well depth when fitting Cero Plus in a mat well. Cero Plus can be cut to fit mat well size.

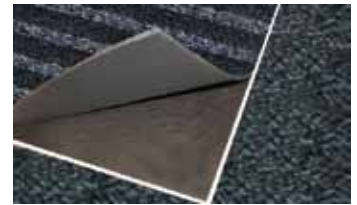

Technical Specifications: Cero Plus Rolls

Product Construction	Solution dyed high-twist and heat-set multi-filament nylon tufted in alternate rows with mono-filament nylon - 100% PVC backing
Size in cm (ca.)	200x2500
Fabric weight (ca.)	860 gms/m ²
Total weight	3360 gms/m ²
Pile height	9.5 mm
Electrical behaviour	EN ISO 14041 test - Antistatic
UV resistance	ISO 105-B02 test, rated 8 (max.mark)
Fire resistance classification	EN ISO 13501 test - C _{fl} - s1

All specifications are according to ISO 9001 Quality certification and ISO 14001 Environmental certification, and are subject to change to meet the ongoing improvements and innovation of our products.

Milliken - Europe, Africa, Middle East

Hilton Fold Lane
Middleton
M24 2HZ Manchester
United Kingdom
T: +44 1942 612999
F: +44 1942 612499
E: Enquiries: matsinfoeurope@milliken.com
E: Orders: matsorderseurope@milliken.com
United Kingdom Free phone: 0800 964 569
Danish Free phone: 8032 0057

Milliken - Americas

920 Milliken Road Spartanburg
South Carolina 29303
T: 1.800.342.5539
F: 706.880.5358
E: Enquiries: matsinfoamericas@milliken.com
E: Orders: matsordersamericas@milliken.com

Milliken - Asia, India, Australia, New Zealand

Unit 2106 & 2105, 2709 & 2708
2 Grand Gateway
3 Hongqiao Road, Xuhui District
Shanghai, China 200030
T: +86 21 61455555
F: +86 21 61 455558
E: Enquiries: matsinfoasiapacific@milliken.com
E: Orders: matsordersasiapacific@milliken.com